




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification: H01S 3/06, 3/085</p>	<p>A2</p>	<p>(11) International Publication Number: WO 96/27223</p> <p>(43) International Publication Date: 6 September 1996 (06.09.96)</p>
<p>(21) International Application Number: PCT/US96/02626</p> <p>(22) International Filing Date: 27 February 1996 (27.02.96)</p> <p>(30) Priority Data: 08/398,206 2 March 1995 (02.03.95) US</p> <p>(71) Applicant: UNITED TECHNOLOGIES CORPORATION [US/US]; United Technologies Building, Hartford, CT 06101 (US).</p> <p>(72) Inventors: D'AMATO, Mary, A.; Administratrix of estate of Francis X. D'Amato, 12 Forest Drive, Holden, MA 01520 (US). BALL, Gary, A.; 19 Newbury Court, Simsbury, CT 06070 (US). MELTZ, Gerald; 77 Daventry Hill Road, Avon, CT 06001 (US).</p> <p>(74) Agent: DEPARDO, Gerald, L.; United Technologies Research Center, Legal Dept. - MS 129-6, 411 Silver Lane, East Hartford, CT 06108 (US).</p>		<p>(81) Designated States: CA, JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published Without international search report and to be republished upon receipt of that report.</p>

(54) Title: POLARIZED FIBER LASER SOURCE

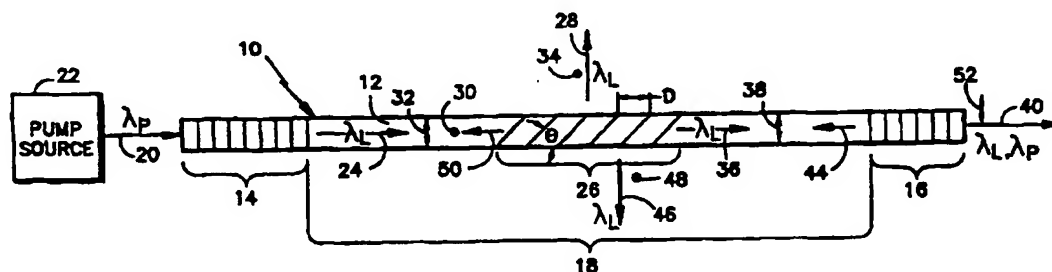

(57) Abstract

A polarized fiber laser source includes a fiber laser (10) comprising a pair of Bragg gratings (14, 16) at opposite ends of a fiber laser cavity (18) which is doped with a rare-earth dopant so as to allow lasing to occur at a lasing wavelength λ_L . A grating tap (26) is provided along a portion of the laser cavity (18) to couple-out a predetermined amount of light along one polarization, e.g., the "s" polarization, at the lasing wavelength λ_L . This causes one polarization mode to experience more loss than the other, thereby allowing the fiber laser to lase only on the less lossy polarization mode and causing the laser output light (40) to be polarized only along such polarization.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

Description
Polarized Fiber Laser Source

5 Cross References to Related Applications

Copending US Patent Application, Serial No. 08/397,467, entitled, "Single Polarization Fiber and Amplifier", filed contemporaneously herewith, contains subject matter related to that disclosed
10 herein.

Technical Field

This invention relates to fiber lasers and more particularly to polarization controlled fiber
15 lasers.

Background Art

It is known in the art of fiber lasers that a fiber laser comprises a length of optical fiber (or
20 laser cavity) which is doped with an optically active rare-earth ion (or gain medium), e.g., Neodymium or Erbium, and has optical reflectors spaced apart by a predetermined distance along the fiber with the gain medium therebetween. The fiber
25 is optically pumped by pump light having a predetermined pump wavelength which excites the gain medium such that the population of excited atoms is greater than the population of unexcited (or less excited) atoms in the lasing transition (known as
30 population inversion). As the energy of the atoms in the gain material transition back to their original unexcited state (or a lower energy level), photons are emitted at a predetermined lasing wavelength. Such emitted photons cause (or

stimulate) other excited atoms in the gain medium to emit similar photons, thereby creating the well known lasing effect. The optical reflectors are designed to reflect a predetermined amount of light at the lasing wavelength and the length of the cavity and the amount of cavity gain is set so as to cause light at the lasing wavelength to continuously oscillate within the cavity to allow lasing to be sustained. Also, at least one of the reflectors does not reflect light at the pump wavelength, thereby allowing the pump light to enter the cavity through one of the end reflectors.

It is also known that such reflectors may be Bragg gratings which are impressed into the optical fiber, as discussed in U.S. Patent Nos. 4,807,950 and 4,725,110 entitled "Method for Impressing Gratings within Fiber Optics", both to Glenn et al.

Such a laser can be designed and fabricated so as to achieve single longitudinal mode lasing performance with narrow linewidth and continuous tunability over a predetermined wavelength range, as is discussed in U.S. Patent Nos. 5,305,335, entitled "Single Longitudinal Mode Pumped Optical Waveguide Laser Arrangement", to Ball et al, and U.S. Patent No. 5,317,576, entitled "Continuously Tunable Single-Mode Rare-Earth Doped Pumped Laser Arrangement", to Ball et al.

Such a laser can be designed and fabricated so as to achieve single longitudinal mode lasing performance with narrow linewidth and continuous tunability over a predetermined wavelength range, as is discussed in U.S. Patent Nos. 5,305,335, entitled "Single Longitudinal Mode Pumped Optical Waveguide Laser Arrangement", to Ball et al, and U.S. Patent No. 5,317,576, entitled "Continuously Tunable

Single-Mode Rare-Earth Doped Pumped Laser Arrangement", to Ball et al.

Such fiber laser sources offer the possibility of improved performance characteristics such as
5 higher power and narrower linewidth when compared to semiconductor laser sources and diode pumped solid state laser sources commonly used in fiber optic systems.

However, such prior art laser sources do not
10 provide a simple inexpensive means for controlling the polarization state of the output light from the laser. Such polarization control of the output light from the fiber laser is desirable if the fiber laser is used as a source to provide light to
15 polarization sensitive fiber components such as fiber couplers, waveguide devices, or polarization sensitive optical modulators. Also, having polarization control is useful if a plurality of fiber lasers output lights are to be combined.

20 Further, because most optical fibers have some amount of birefringence (i.e., a slightly different refractive index for the two polarizations), and because the process of writing fiber gratings induces a slight birefringence in the fiber grating,
25 the output light from a fiber laser will generally be randomly elliptically polarized.

Alternatively, the fiber laser cavity may be made from polarization preserving (or maintaining) fiber; however, such fiber will not prevent lasing
30 on more than one polarization mode.

Thus, it would be desirable to provide a fiber laser which has consistent polarization control of the laser output light.

Disclosure of Invention

Objects of the invention include provision of a fiber laser source which has a predetermined polarization controlled output light.

5 According to the present invention a polarization controlled waveguide laser comprises a solid optical waveguide which propagates laser light having polarization components along a first polarization mode and along a second polarization
10 mode; a pair of reflective elements disposed a predetermined distance apart along said waveguide, each reflecting said laser light; a portion of said waveguide between said reflective elements being a gain medium; one of said reflective elements passing
15 a predetermined amount of said laser light as a laser output light; and a grating tap having a predetermined angle, grating spacing, grating length, and grating strength, such that a predetermined amount of said laser light along said
20 first polarization mode is coupled out of said waveguide so as to cause sufficient loss along said first polarization mode to not allow lasing to occur along said first polarization mode and such that a sufficient amount of said laser light along said
25 second polarization mode is not coupled out of said waveguide so as to allow lasing to be sustained along said second polarization mode, thereby causing said output light to be polarized only along said second polarization mode.

30 According further to the present invention, at least one of the reflective elements comprises a Bragg grating. Still further according to the present invention the angle of the grating tap is about 45 degrees. In further accord to the present

invention, the waveguide comprises polarization maintaining optical fiber.

The invention represents a significant improvement over the prior art by providing a
5 predetermined polarization control of laser output light from a fiber laser. The invention places a Bragg grating oriented at a predetermined angle and grating spacing so as to couple-out a predetermined amount of one polarization state at the lasing
10 frequency from the laser cavity, thereby suppressing such state without introducing significant loss into the orthogonal polarization state upon which lasing will occur. Also, it is not essential that the grating reject a high percentage of the polarization
15 state being suppressed, but rather it need only couple out more light along the polarization state to be suppressed than the orthogonal polarization state on which lasing occurs. In particular, the invention introduces sufficient loss in the
20 polarization mode to be suppressed such that the lasing condition (i.e., the gain times the loss is greater than or equal to one) is not met for that polarization mode, while allowing such lasing condition to be met for the orthogonal polarization
25 mode. Thus, the angled (or slanted) Bragg grating controls the polarization state of the fiber laser output light. Furthermore, use of an in-fiber Bragg grating for such polarization control eliminates the need for cutting, splicing, or grinding the fiber
30 laser cavity, thereby allowing for easy fabrication, minimizing cavity losses, and placing minimal constraints on the eventual packaging of the overall fiber laser.

The foregoing and other objects, features and
35 advantages of the present invention will become more

apparent in light of the following detailed description of exemplary embodiments thereof as illustrated in the accompanying drawings.

5 **Brief Description of Drawings**

Fig. 1 is a schematic block diagram of a polarization controlled fiber laser source, in accordance with the present invention.

10 Fig. 2 is a schematic block diagram of a polarization controlled master oscillator power amplifier (MOPA) arrangement, in accordance with the present invention.

15 Fig. 3 is a schematic block diagram of a polarization controlled external cavity semiconductor laser, in accordance with the present invention.

20 Fig. 4 is a schematic block diagram of a polarization controlled distributed feedback fiber laser, in accordance with the present invention.

Best Mode for Carrying out the Invention

Referring to Fig. 1, a polarization controlled fiber laser 10 includes a predetermined length of optical fiber 12 having Bragg gratings 14,16
25 embedded in the core of the fiber a predetermined distance apart along the fiber 12. Between the gratings 14,16 is a region of fiber 18 of which all or a portion thereof is doped with a predetermined rare-earth dopant (or gain or active medium), e.g.,
30 Erbium, Neodymium, etc., which acts as a laser cavity. Also, the section of fiber where the gratings are located may also be doped if desired. A Bragg grating, as is known, is a periodic variation in refractive index of the fiber core which has a
35 reflectivity profile which reflects a predetermined

narrow wavelength band of light and passes all other wavelengths. The gratings 14,16 have a grating spacing so as to provide a peak reflectivity at a lasing wavelength λ_L (e.g., 1550 nanometers, for an erbium-doped cavity) of the fiber laser.

The gratings 14,16 and the doped fiber cavity 18 make up the three fundamental elements of a typical fiber laser, such as is described in U.S. Patent No. 5,305,335, entitled "Single Longitudinal Mode Pumped Optical Waveguide Laser Arrangement", to Ball et al, and U.S. Patent No. 5,317,576, entitled "Continuously Tunable Single-Mode Rare-Earth Doped Pumped Laser Arrangement", to Ball et al., as well as U.S. Patent No. 5,237,576 entitled "Article Comprising an Optical Fiber Laser" to DiGiovanni, all of which are incorporated herein by reference.

More specifically, the fiber laser 10 is pumped by input pump light 20 from a pump light source 22, e.g., a laser diode. The pump light 20 has a pumping wavelength λ_P , e.g., 980 or 1480 nanometers (for an erbium-doped laser cavity) and may be randomly elliptically polarized. Other pump wavelengths may be used if desired provided it is within the absorption band of the rare-earth dopant of the laser cavity. The pump light passes through the grating 14 (because the pump wavelength λ_P is not in the reflection wavelength band of the grating 14) and enters the laser cavity 12. The pump wavelength λ_P excites the gain medium portion of the cavity 18 to a level where lasing occurs. The gain medium then emits photons at the lasing wavelength λ_L , as indicated by a line 24. The light 24 is incident on an embedded angled (or slanted) fiber Bragg grating tap 26 having an angle θ (relative to the

longitudinal axis of the fiber) and a spacing D between peaks in the refractive index perturbation, so as to efficiently couple light at the lasing wavelength(s) λ_L and at one polarization out of the fiber core, as indicated by a line 28 (discussed more hereinafter). The grating tap 26 is written into the fiber core in a manner similar to that discussed in U.S. Patent No. 5,016,032, entitled "Optical Waveguide Embedded Light Redirecting and Focusing Bragg Grating Arrangement", to Meltz et al, and U.S. Patent No. 5,042,897, entitled "Optical Waveguide Embedded Light Redirecting Bragg Grating Arrangement", to Meltz et al, both incorporated herein by reference. Any other technique for impressing the gratings into the fiber may be used if desired. It should be understood that the grating spacing for the end gratings 14,16 will be different than (i.e., closer than) the perturbation spacing for the angled grating tap 26 because they reflect the same wavelength (i.e., the lasing wavelength λ_L).

In a conventional fiber laser the light 24 within the laser cavity is composed of light which has polarization components along two optical orthogonal polarization states (or axes or modes), i.e., the "s" polarization state as indicated by a dot 30 and/or the orthogonal "p" polarization state as indicated by a line 32. However, in the present invention, the grating tap 26 acts as a polarizing element by reflecting a predetermined amount, e.g., 2%, of the incident radiation in the "s" polarization while reflecting a minimal amount, e.g., less than 0.1%, of incident radiation in the "p" polarization.

As such, the light 28, which is tapped-out of the laser cavity, consists primarily of light polarized along the "s" polarization state, as indicated by a dot 34. Accordingly, light which
5 passes through the slanted grating tap 26, as indicated by a line 36, has a preferential polarization along the "p" polarization state, as indicated by a line 38. Therefore, the light 36 that passes through the grating tap 26 will be 98%
10 of the "s" polarized light that was incident on the grating tap 26 and 99.9% of the "p" polarized incident light on the grating tap 26. Other grating tap percentages may be used if desired, as discussed hereinafter.

15 The gratings 14,16 for a fiber laser, as discussed hereinbefore, are designed to have a narrow reflection wavelength at the lasing wavelength λ_L . Typically, the front grating 14 reflects 98% of light at the lasing wavelength λ_L and
20 the back grating 16, from which the output laser light exits, typically reflects 98% of the cavity light 36 at the lasing wavelength λ_L . Other percent reflectivities may be used if desired. The light 36 at the lasing wavelength λ_L that passes through the
25 back grating 16 exits the laser as output laser light, as indicated by a line 40. As is known, for lasing to be sustained, the lasing condition (or lasing threshold) must be met (i.e., the round trip small signal gain times the round trip loss for
30 light within the cavity is greater than or equal to one). This is accomplished by setting the amount of gain, the length of the cavity, and the reflectivity of the gratings so as to meet this condition. It should be understood that the length of the cavity

is not critical to the present invention, i.e., the invention will work on any length cavity.

Symmetrically, a predetermined amount of the cavity light 36 reflects off the back grating 16, as indicated by a line 44. The light 44 is incident on the grating tap 26 which reflects the aforementioned predetermined amount of light at the lasing wavelength out of the cavity, as indicated by a line 46 having a polarization along the "s" polarization state, as indicated by a dot 48. As such the portion of the light 44 which passes through the grating tap 26, as indicated by a line 50 is primarily polarized along the "p" polarization state, as indicated by the line 32.

Because the light having the "p" polarization state is not tapped out of the cavity by the grating tap 26, and the amount of cavity loss (passed light) associated with the gratings 14,16 is the same for both polarizations, the loss of light oscillating in the laser cavity is lower for the "p" polarized light than the "s" polarized light. As a result, the "s" polarized light is essentially suppressed from lasing because the fiber laser will lase on the most efficient optical longitudinal mode. In particular, the loss in the "s" polarization is increased such that the lasing threshold is not achieved, whereas the "p" polarization mode is above the lasing threshold. Consequently, the output laser light 40 exiting the cavity is "p" polarized, as indicated by a line 52.

In order to suppress the unwanted polarization state of the oscillating longitudinal mode, the grating tap 26 introduces more than 1% single pass loss into the cavity. This performance can easily be achieved using a "weak" fiber Bragg grating tap,

e.g., a 1.0 cm long grating having a Δn of 2.66×10^{-4} , and an $n=1.46$; thus $\Delta n/n=.000182$ or .02% fractional index change. Other grating lengths and/or $\Delta n/n$ may be used if desired. It is known in the art how to fabricate grating taps to couple-out a predetermined amount of incident light. In general, the longer the grating tap, the more light that is coupled-out of the cavity. Also, the "stronger" the grating tap (i.e., the larger the change in refractive index of the grating), the more light that is coupled-out of the cavity. A more detailed discussion of the amount of light coupled-out of a fiber for a given grating tap length and strength ($\Delta n/n$) is provided in Copending US Patent Application, Serial No. (UTC Docket No. R-3912), entitled, "Single Polarization Fiber and Amplifier", filed contemporaneously herewith.

The precise amount of intracavity loss that must be introduced to suppress the unwanted polarization state from lasing is determined by the particular laser design; however, a 1% single pass loss should be sufficient to ensure single polarization output for a short fiber laser, e.g., less than 10 cm. More specifically, as is known, suppression of adjacent longitudinal modes is achieved by use of Bragg grating reflectors having narrow bandwidth, typically 0.1 to 0.2 nanometer (nm) full-width-half-max, thereby providing substantially single mode fiber laser operation. Because the degree of differential loss that is required to suppress one polarization state from lasing should be substantially less than that required to suppress adjacent longitudinal lasing modes of the fiber laser. As such, 1% single-pass

loss for the grating tap 26 should be sufficient to ensure single polarization of the output laser light 40 and less than 1% loss may likely be sufficient in many instances.

5 It is known that a short slanted grating tap exhibits polarization sensitive reflection as is discussed in the article: G. Meltz et al, "In-fiber Bragg Grating Tap", Optical Fiber Communication Conference, 1990 Technical Digest Series, Vol. 1
10 (Jan. 1990). In that article, a short (5 mm) grating tap was formed in a polarization maintaining fiber to illustrate this principle. It is also known that the sensitivity of the slanted grating tap 26 to the polarization of incident light is
15 related to the optical theory on Brewster's angle. In particular, the grating 26 reflects light polarized normal to the plane of incidence (or parallel to the reflecting surface of the tap, or "s" polarized in Fig. 1), independent of the angle
20 of incidence. However, light polarized parallel to the plane of incidence (or normal to the reflecting surface, or "p" polarized in Fig. 1) and incident on the grating at the Brewster's angle, is transmitted with minimal reflection. Thus, the angle of the
25 grating tap 26 should be set such that the cavity light incident on the grating tap is incident on the tap at the Brewster's angle. The Brewster's angle for a small fractional refractive index change ($\Delta n/n$) at the reflection interface, e.g., 0.05-0.1%
30 (which is typical for a Bragg grating), is approximately 45 degrees; however, even for "strong" gratings (e.g., $\Delta n/n=0.5\%$), the angle is close to 45 degrees. More specifically, the known relationship for the Brewster's angle is:

$$\tan \theta_p = n_t/n_i \quad [\text{Eq. 1}]$$

where θ_p is the angle of incidence of the light
5 incident on the tap, n_t is the refractive index of
the grating tap, and n_i is the incident refractive
index outside the grating tap. Thus, the grating tap
26 will typically be set at about 45 degrees from
10 the longitudinal axis of the fiber so as to allow
the tap to reflect only light polarized parallel to
the reflecting surface of the grating tap. Other
values for the angle θ of the tap 12 may be used if
desired based on the Δn for the grating tap used in
a given case.

15 Although the invention has been described as
using a Bragg grating at either end of the gain
cavity, the polarization controlling concept of the
present invention applies equally well to fiber
laser cavities which use more conventional mirrors,
20 such as dielectrics or other reflecting surfaces,
for optical cavity feedback. Also, it should be
understood that the fiber grating tap of the present
invention could also be used to control the
polarization of a fiber ring resonator in the same
25 way as it is used to control the polarization of a
standing wave laser cavity of Fig. 1.

Also, although the grating tap 26 is shown to
be in the center of the laser cavity 18, it may be
placed anywhere along the laser cavity between the
30 two reflectors 14,16.

Also, because the wavelength band of the out-
coupling loss for an angled grating is broad, e.g.,
10 nanometers (which is broader than the direct
reflection wavelength profile for straight

gratings), the invention can be used to control the polarization for a multiple longitudinal lasing mode fiber laser, provided that sufficient loss is introduced in one polarization mode for selected
5 longitudinal modes so that such longitudinal modes are below the lasing threshold such and do not lase.

Thus, the invention will work equally well with single or multiple longitudinal mode fiber lasers.

Further, it should be understood that the fiber
10 laser may be made of polarization preserving (or maintaining) fiber. In that case, the lasing polarization can be easily identified at the end of the fiber for connection to down-stream optical components. Also, the fiber laser may be made of a
15 fiber having more than one spatial mode (i.e., multi-spatial mode fiber). In that case, the polarization of light propagating along each mode may be coupled out of the laser by one or more slanted grating taps (depending on the magnitude of
20 the difference between the optical frequency associated with each spatial mode and the bandwidth of the grating tap) in a manner similar to that described in US Patent No. 5,048,913, entitled "Optical Waveguide Embedded Transverse Spatial Mode
25 Discrimination Filter", to Meltz et al.

Referring now to Fig. 2, the invention will work equally well in a Master Oscillator Power Amplifier (MOPA) arrangement, similar to that described in copending US Patent Application, Serial
30 No. 08/013,490, "Embedded Bragg Gating Pumped Optical Waveguide Laser Source/Power Amplifier Arrangement", to Ball et al. In particular, the polarization controlled fiber laser 10 is connected to an optical isolator 100. The output of the
35 isolator 100 is connected to a optical fiber

amplifier 102, which comprises an optical fiber doped with a rare-earth dopant (or gain medium), e.g., erbium. The isolator 100 prevents light emitted from the amplifier 102 from entering and
5 disrupting the operation of the fiber laser 10.

As discussed hereinbefore, the light 40 comprises light at the pump wavelength λ_p that was not absorbed by the gain medium in the fiber laser 10 as well as light at the lasing wavelength λ_L .
10 The light 40 exits the fiber laser 10, passes through the isolator 100 and enters the amplifier 102, where the pump wavelength λ_p excites the gain medium of the amplifier 102. The gain medium emits light 104 at the lasing wavelength λ_L having a
15 higher intensity than the light 40 at the lasing wavelength that exited the laser 10. The fiber amplifier 102 has a grating tap 108, similar to the tap 26 within the fiber laser 10, which extends along the entire length or a substantial portion of
20 the length of the fiber amplifier 102. The tap 108, similar to the tap 26, is oriented at an angle and has a grating spacing so as to couple light 110 out of the fiber 102 having one polarization (e.g., dot 111) and pass the light 104 having the orthogonal
25 polarization (e.g., line 112). The polarization of the light 40 exiting the fiber laser 10 is aligned with the polarization axis which is passed by the amplifier 102. The opposite polarizations may be used, if desired.

30 Use of the grating tap 108 allows only the polarization of the output light 40 from the laser 10 to be passed by the amplifier 102, thereby ensuring that the output light 104 will be polarized along the same polarization mode as the output of

the laser 10 (i.e., along line 112). Also, if the light 40 from the laser 10 had some component in the undesired polarization, the tap 108 will further attenuate that component at the output. Also,
5 instead of or in addition to the grating tap 108, the fiber 102 may be polarization preserving (or maintaining) fiber. In that case, if the grating tap 108 is also used, tap need not extend over the entire length of the fiber amplifier. The
10 continuous grating tap 108 in the MOPA amplifier 102 is also discussed in copending US Patent Application, Serial No. (UTC Docket No. R-3912), entitled, "Single Polarization Fiber and Amplifier", filed contemporaneously herewith.

15 Alternatively, instead of using the polarization controlled fiber laser 10 as the fiber laser in Fig. 2, a conventional fiber laser without polarization control may be used. In that case, the light 40 would be elliptically polarized and the
20 grating tap 108 would couple at a predetermined portion of laser light along one polarization (e.g., dot 111) and pass the other polarization mode (e.g., line 112). Thus, the output light 104 would have a preferential polarization along the line 112.

25 Referring to Fig. 3, the invention will also work with an external cavity semiconductor laser. In that case, a semiconductor laser 190 (e.g., a laser diode) is electrically pumped by a control circuit 192 which provides a current loop I along
30 the lines 194, 196. The laser diode 190 has a front facet 202 and a rear facet 204. The front facet 202 is coated with an anti-reflection (AR) coating which allows laser light within the semiconductor laser 190 to not be reflected by the front facet 202. An
35 optical fiber 206 is connected to the laser diode

front facet 202 at one end and has a straight grating 210 embedded at the opposite end. The grating 210 acts as one laser cavity reflector, and the facet 204 is the other reflector. An angled grating tap 212 is embedded in the fiber 208 and reflects one polarization (e.g., a dot 213) out of the fiber 208 as indicated by lines 214, 216. Consequently, the external cavity semiconductor laser will have more loss along one polarization than the other and lase on the less lossy polarization mode. Thus, the output light 218 will be polarized along one polarization (e.g., the line 280). Also, the fiber 208 is typically not a gain medium. Further, there may be a lens (not shown) between the laser diode and the fiber pigtail to allow the light to be efficiently coupled into the fiber.

Referring to Fig. 4, the invention will also work equally well with a distributed feedback laser. In that case, the pump light 20 from the pump source 22 is provided to a fiber 250 having 2 gratings 252, 254 which extend from opposite ends of the fiber 250 toward the middle thereof, but end a predetermined distance 11 from each other, e.g., one quarter of a lasing wavelength, so as to support single longitudinal mode lasing, similar to that discussed in the articles: J. Kringlebotn et al, "Er³⁺:Yb³⁺ -Codoped Fiber Distributed-Feedback Laser", Optics Letters, Vol. 19, No. 24, pp 2101-2103 (Dec. 1994); and H. Kogelnik et al, "Coupled-Wave Theory of Distributed Feedback Lasers", J. Appl. Phys., Vol. 43, No. 5, pp 2327-2335 (May 1972). An angled grating tap 256, similar to the tap 26, extends over the entire length of the fiber 250 and is oriented at an angle and has a grating

spacing so as to couple-out light 258 of one polarization (e.g., a dot 260) and pass light of the other polarization (a line 262) at the lasing wavelength. Thus, lasing will occur only on the less lossy polarization (262), and the output light 264 will be polarized along that polarization 262. Alternatively, the gratings 252,254 may be replaced with one continuous grating without the quarter wavelength gap. This typically results in multiple longitudinal mode lasing.

Although the lasing frequency (or wavelength) for each polarization mode will be different due to cavity birefringence, the difference between the lasing frequencies for the two polarization modes depends on the amount of fiber birefringence and is typically small. However, to maximize performance of the present invention, the slanted grating may be designed for maximum reflectivity at the lasing frequency associated with the polarization mode being coupled-out of the cavity (and that will not lase).

Also, it should be understood that the invention will work equally well with any solid optical waveguide, e.g., a planar, rib, or channel waveguide, instead of an optical fiber.

Claims

What is claimed is:

- 1 1. A polarization controlled waveguide laser,
2 comprising:
3 a solid optical waveguide which propagates
4 laser light having polarization components along a
5 first polarization mode and along a second
6 polarization mode;
7 a pair of reflective elements disposed a
8 predetermined distance apart along said waveguide,
9 each reflecting said laser light;
10 a portion of said waveguide between said
11 reflective elements being a gain medium;
12 one of said reflective elements passing a
13 predetermined amount of said laser light as a laser
14 output light; and
15 a grating tap having a predetermined angle and
16 grating spacing such that a predetermined amount of
17 said laser light along said first polarization mode
18 is coupled out of said waveguide so as to cause
19 sufficient loss along said first polarization mode
20 to not allow lasing to occur along said first
21 polarization mode and such that a sufficient amount
22 of said laser light along said second polarization
23 mode is not coupled out of said waveguide so as to
24 allow lasing to be sustained along said second
25 polarization mode, thereby causing said output light
26 to be polarized only along said second polarization
27 mode.
- 1 2. The laser of claim 1 wherein at least one of
2 said reflective elements comprises a Bragg grating.

- 1 3. The laser of claim 1 wherein said gain medium
2 comprises a rare-earth dopant.
- 1 4. The laser of claim 1 wherein only a single
2 longitudinal mode lases in the laser.
- 1 5. The laser of claim 1 wherein said angle of said
2 grating tap is about 45 degrees.
- 1 6. The laser of claim 1 wherein said waveguide is
2 polarization maintaining optical fiber.
- 1 7. The laser of claim 1 wherein said waveguide is
2 an optical fiber.
- 1 8. The laser of claim 1 wherein said waveguide has
2 a plurality of spatial modes.
- 1 9. The laser of claim 1 wherein a portion of said
2 waveguide comprises a portion of a semiconductor
3 laser.
- 1 10. The laser of claim 9 wherein one of said
2 reflective elements comprises a facet of said
3 semiconductor laser.
- 1 11. The laser of claim 1 wherein said reflective
2 elements comprise a distributed feedback
3 arrangement.
- 1 12. The laser of claim 1 wherein the laser is
2 optically coupled to an optical amplifier.

- 1 13. The laser of claim 1 wherein said optical
- 2 amplifier comprises polarization maintaining fiber.

fig. 1




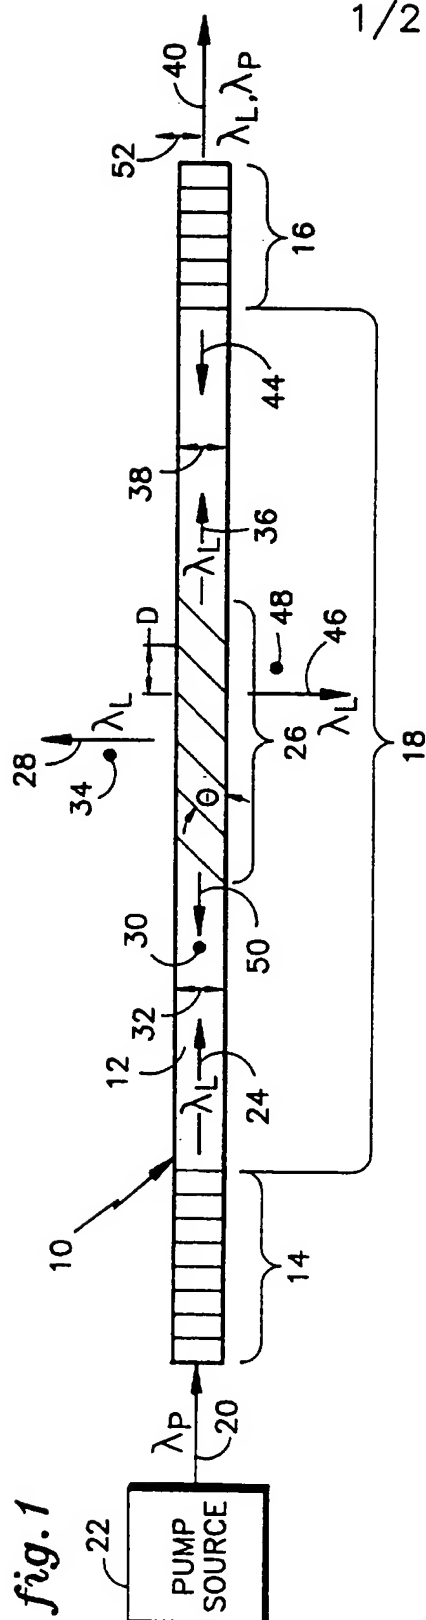


fig. 2

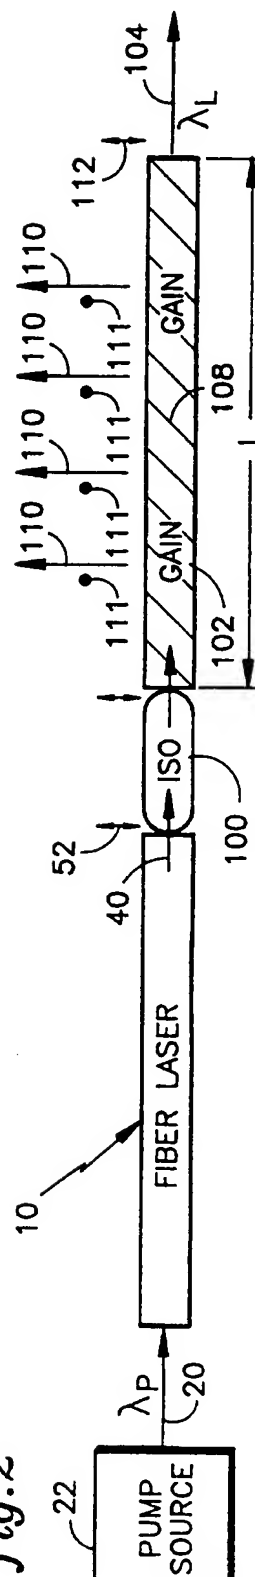

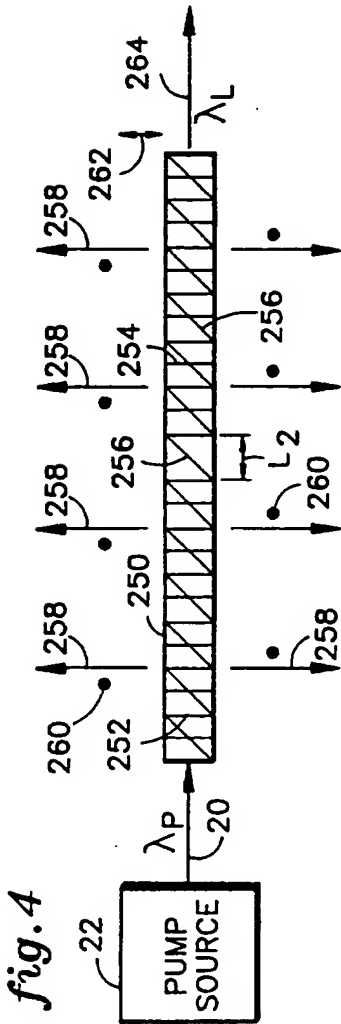


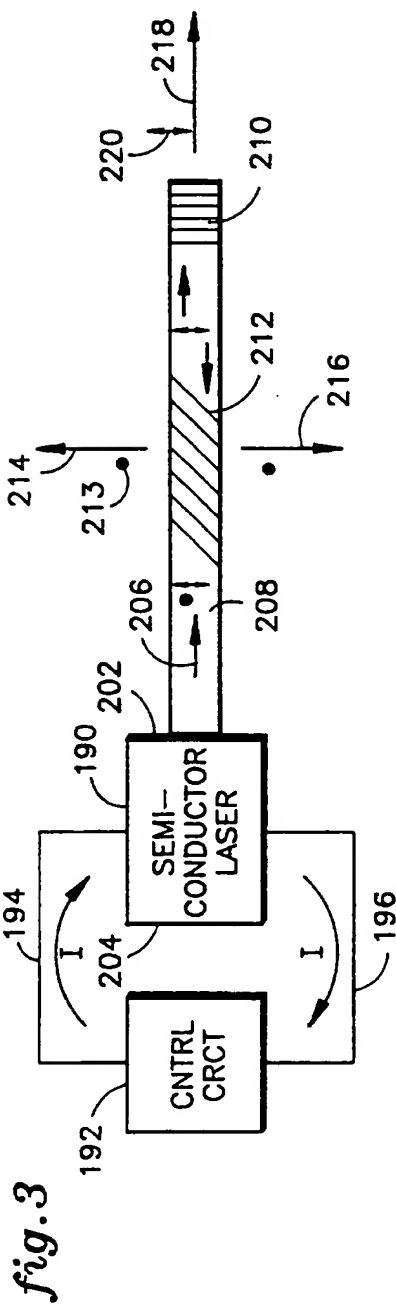

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H01S 3/06, 3/085	A3	(11) International Publication Number: WO 96/27223 (43) International Publication Date: 6 September 1996 (06.09.96)
(21) International Application Number: PCT/US96/02626 (22) International Filing Date: 27 February 1996 (27.02.96) (30) Priority Data: 08/398,206 2 March 1995 (02.03.95) US (71) Applicant: UNITED TECHNOLOGIES CORPORATION [US/US]; United Technologies Building, Hartford, CT 06101 (US). (72) Inventors: D'AMATO, Mary, A.; Administratrix of estate of Francis X. D'Amato, 12 Forest Drive, Holden, MA 01520 (US). BALL, Gary, A.; 19 Newbury Court, Simsbury, CT 06070 (US). MELTZ, Gerald; 77 Daventry Hill Road, Avon, CT 06001 (US). (74) Agent: DEPARDO, Gerald, L.; United Technologies Research Center, Legal Dept. - MS 129-6, 411 Silver Lane, East Hartford, CT 06108 (US).	(81) Designated States: CA, JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> (88) Date of publication of the international search report: 10 October 1996 (10.10.96)	

(54) Title: POLARIZED FIBER LASER SOURCE

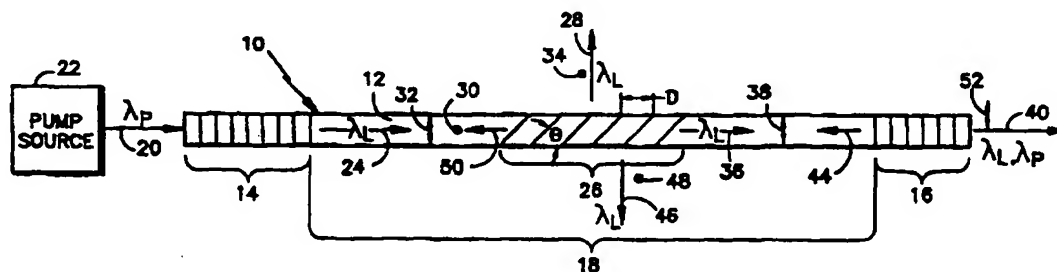

(57) Abstract

A polarized fiber laser source includes a fiber laser (10) comprising a pair of Bragg gratings (14, 16) at opposite ends of a fiber laser cavity (18) which is doped with a rare-earth dopant so as to allow lasing to occur at a lasing wavelength λ_L . A grating tap (26) is provided along a portion of the laser cavity (18) to couple-out a predetermined amount of light along one polarization, e.g., the "s" polarization, at the lasing wavelength λ_L . This causes one polarization mode to experience more loss than the other, thereby allowing the fiber laser to lase only on the less lossy polarization mode and causing the laser output light (40) to be polarized only along such polarization.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 96/02626

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 6 H01S3/06 H01S3/085

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H01S

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	OPTICAL FIBER COMMUNICATION CONFERENCE. (OFC), SAN FRANCISCO, JAN. 22 - 26, 1990, vol. 1, 22 January 1990, INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS, page 24 XP000146226 MELTZ G ET AL: "IN-FIBER BRAGG GRATING TAP" see figure 3	1-13
Y	--- EP,A,0 486 930 (GEN INSTRUMENT CORP) 27 May 1992 see column 9, line 15 - line 20	1-8
Y	--- DE,A,35 43 509 (PHILIPS PATENTVERWALTUNG) 11 June 1987 see figure 1 --- -/-	9,10

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

A document member of the same patent family

Date of the actual completion of the international search

17 July 1996

Date of mailing of the international search report

26.07.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Galanti, M

INTERNATIONAL SEARCH REPORT

Int'l Application No

PCT/US 96/02626

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	OPTICS LETTERS, vol. 19, no. 24, 15 December 1994, pages 2101-2103, XP000485804 KRINGLEBOTN J T ET AL: "ER3+:YB3+-CODOPED FIBER DISTRIBUTED-FEEDBACK LASER" see abstract ---	11
Y	IEEE PHOTONICS TECHNOLOGY LETTERS, vol. 6, no. 2, 1 February 1994, pages 192-194, XP000439747 BALL G A ET AL: "60 MW 1.5 M SINGLE-FREQUENCY LOW-NOISE FIBER LASER MOPA" see figure 1 ---	12,13
A	US,A,5 166 940 (TUMMINELLI RICHARD P ET AL) 24 November 1992 see column 3, line 60 - line 68; figure 2 ---	1-8
A	ELECTRONICS LETTERS, 9 JUNE 1994, UK, vol. 30, no. 12, ISSN 0013-5194, pages 972-973, XP002008679 KRINGLEBOTN J T ET AL: "Highly-efficient, low-noise grating-feedback Er/sup 3+/:Yb/sup 3+/ codoped fibre laser" see abstract -----	1-8

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 96/02626

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0486930	27-05-92	US-A- 5134620	28-07-92
		US-A- 5151908	29-09-92
		CA-A- 2055324	21-05-92
		DE-D- 69119708	27-06-96
		JP-A- 4287384	12-10-92
		US-A- 5243609	07-09-93
DE-A-3543509	11-06-87	NONE	
US-A-5166940	24-11-92	NONE	